

# LED Driver

## EUCO ARENA SPORT 600 W Series

# EUCO ARENA SPORT

### Highlights & Features

- Output power: max 600W
- Wide Input voltage: 198-440V AC
- Ultra high Efficiency 97.5%
- Control method: compliant with DALI-2 Part 251/252/253 and DMX/RDM
- Programmable output current range 700-2000 mA
- Low current ripple (typ.1%) and flicker free for HDTV broadcasting
- High-accuracy integrated power metering
- Constant Light Output (CLO) function
- Autonomous dimming via Midnight Centric Timer
- Minimum dimming level 0.1%
- Input surge protection: DM 6kV; CM 10kV
- Max signal control distance 300 meters
- Reliable IP66 input/output connectors
- Afterglow effect free



### Standards & Marks



**Model Number:** EUCO-600200G□A□□

**Unit Weight:** ~2.2kg

**Dimensions (L × W × H):** 315x100x49 mm

### General Description

Delta EUCO ARENA SPORT 600W series is a compact-single output LED driver, which is designed to provide ultimate flexibility and reliability to operate under a wide range of temperatures while retaining highly accurate specifications over its lifetime. The EUCO-600W makes an ideal solution for Stadium Lighting due to its low ripple current level and flicker free, which is indispensable for Live TV broadcasting conditions. Also due to its robust design, the EUCO-600W is well-suited for industrial lighting, high mast lighting, and horticulture applications. This driver was specifically conceived and intended to offer remarkably high efficiency to achieve substantial energy savings. Additionally, a wide dimming range, advanced control, and autonomous dimming (Midnight Centric Timer) ensure adaptability for dynamic atmospheres and seamless event adjustments. The EUCO-600W driver offers a remote-control function, allowing the driver to be installed up to 300 meters from the luminaire, which provides greater flexibility in installation, operation, and easy maintenance.

### Model Information

Model Number	Input Voltage Range	Rated Output Power	Output Current Channel	Control Interface
EUCO-600200GIA	220/400Vac(typical) 198~440Vac(range)	600W	1	DALI-2
EUCO-600200GDA		600W	1	DMX/RDM

### Model Numbering

EU	C	O	600	□□□	G	□	A	□□
Market Code	Constant Current	Outdoor	Output power 600: 600W	Output Current 200: 2000mA	i-Programming	Function I: DALI-2 & D4i <sup>1</sup> D: DMX/RDM	Variable A - Standard	Mode series, can be 0~9, A~Z or blank.

1. This model supports parts of the D4i specification, more details refer to Control Interface Standards.

# LED Driver

## EUCO ARENA SPORT 600 W Series

### Specifications

#### Input Ratings / Characteristics

Specification	Min.	Typ.	Max.	Conditions
Nominal Input Voltage	220Vac	-	400Vac	
Input Voltage Range	198Vac	-	440Vac	
Nominal Input Frequency	-	50/60Hz	-	
Input Frequency Range	47Hz	-	63Hz	
Nominal Input Current	-	2.85A	3.1A	At 220Vac, 25°C, 600W output
	-	1.54A	1.82A	At 400Vac, 25°C, 600W output
Efficiency <sup>2</sup>	-	96.2%	-	At 220Vac, 25°C, 300V/2A
	-	96.6%	-	At 220Vac, 25°C, 550V/1.1A
	-	96.8%	-	At 400Vac, 25°C, 300V/2A output
	-	97.5%	-	At 400Vac, 25°C, 550V/1.1A output
Standby Power Consumption	-	0.40W	-	At 220Vac, Dim OFF, in compliance with Erp (EU) 2019/2020
	-	0.89W	-	At 400Vac, Dim OFF
Power Factor	-	0.99	-	At 220Vac, 25°C, 600W output
	-	0.98	-	At 400Vac, 25°C, 600W output
Total Harmonic Distortion	-	8%	-	At 220Vac, 25°C, 300V/2A output
	-	13%	-	At 400Vac, 25°C, 300V/2A output
Inrush Current (Apk / 50%-us)	-	8A	-	At 220Vac, 50%Apk to 50%Apk time: 2ms
	-	15A	-	At 400Vac, 50%Apk to 50%Apk time: 2ms
Power metering accuracy	-	±1%	±2%	At 220Vac~400Vac, 100% load

2. 100% Load and tested after 30 minutes warming up.

#### Output Ratings / Characteristics

Specification	Min.	Typ.	Max.	Conditions	
Output Channels	-	1	-		
Default Output Current	-	1200mA	-		
Programmable Output Current Range	700mA	-	2000mA	Operation range refer to Appendix 1	
Output Voltage Range	200V	-	550V		
Max. No Load Output Voltage	-	-	600Vrms		
Total Output Power	-	-	600W		
Output Power Range	-	-	600W		
Output Current Tolerance	-	-	±3%	700~2000mA	
Output Current Ripple	-	1%	2%	(ripple = (pk-pk)/avg), at low frequency(<8kHz)	
	-	10%	18%	(ripple = (pk-pk)/avg), at high frequency(>15kHz)	
Output Remote Distance	-	-	300m	The total voltage drop on the cable should be within 5V	
Turn on Delay Time	DALI version	-	0.7s	1s	Compliant with clause 9.13 of IEC 62386-102:2014
	RDM/DMX version	-	0.7s	1s	Connecting to the controller correctly.
		1.25s	-	2s	No controller or incorrect connection to the controller, compliant with clause 3.5 of ANSI E1.37-1:2012.

# LED Driver

## EUCO ARENA SPORT 600 W Series

### Dimming Control

Specification		EUCO-600200GIA	EUCO-600200GDA
Control interface		DALI-2	DMX/RDM
Dimming range	Logarithmic	0.1%-100% Minimum output current is limited to 2mA.	—
	Linear	0.4%-100% Minimum output current is limited to 2mA	

### Control Interface Standards

Specification	EUCO-600200GIA	EUCO-600200GDA
Control interface standards	DALI-2 IEC 62386-101 Ed 2.0 IEC 62386-102 Ed 2.0 IEC 62386-207 Ed 2.0 IEC 62386 part 251: Memory bank 1 extension (luminaire data) IEC 62386 part 252: Energy report IEC 62386 part 253: Diagnostics and maintenance	DMX / RDM ANSI E1.11 DMX512A ANSI E1.20 RDM – Remote Device Management ANSI E1.37-1 Additional message sets for dimmer

### Additional Dimming Features

Specification	EUCO-600200GIA	EUCO-600200GDA
Autonomous dimming middle of the night	3 different configurable dimming profiles over the night are available for users to select and set in GUI. Details refer to GUI manual.	
Constant lumen output (CLO)	CLO function is to compensate the ageing of the light source, and so to get constant Lumen Output over the lifetime of the product. It's available in GUI to set starting dimming level (for example 90%) and end of life of the product (for example 50,000hrs), so that the driver by counting its functioning hours can do a linear interpolation in between starting dimming level at t=0hrs, and go to 100% at t=end of life. Details refer to GUI manual.	

### Mechanical Characteristics

Specification		EUCO-600200GIA	EUCO-600200GDA
Casing		Aluminum case, Color: anodized(Nature)	
Dimensions (L x W x H)		315x100x49 mm	
Unit Weight		~2.2 kg	
Cooling System		Natural Convection	
INPUT	Wieland RST 20I3F S2 M01VH GN0	With the definition of L1, L2, PE	
OUTPUT	Amphenol CC-03PMFS-QC801P	With the definition of NTC, V+, V-	
DIMMING	Amphenol AD-03PMMS-QC8001	DA+, DA-	D1+, D1-, COM

# LED Driver

## EUCO ARENA SPORT 600 W Series

### Environment & Package

Specification		EUCO-600200GIA	EUCO-600200GDA
Ambient Temperature	Operating	-40 ~+60°C	
	Storage	-40°C to +85°C	
Maximum Case Temperature		+85°C	
Lifetime Case Temperature		+70°C	
Relative Humidity	Operating	10% to 90% RH (Non-Condensing)	
	Storage	10% to 90% RH (Non-Condensing)	
Audible Noise (30cm distance)		Sound Pressure Level (SPL) < 24dBA	
Ingress Protection classification		IP66	
Drop Test (Non-Operating)	According to ASTM D-775, 40cm height drop to concrete floor as below drawing, total 10 times.		
Vibration (Non-Operating)		IEC 60068-2-6, Random: 5 Hz to 10 Hz (1G); 30 min per axis for all X, Y, Z direction	
Packing		4pcs per carton	

### Protections

Specification		Min.	Typ.	Max.	Notes
Input Under Voltage Protection (IUVP)	Protection	160Vac	-	180Vac	The driver shuts down and then restarts to normal status when the fault condition is cleared.
	Recovery	170Vac	-	190Vac	
Input Over Voltage Protection (IOVP)	Protection	460Vac	-	480Vac	
	Recovery	440Vac	-	460Vac	
Open Load & Output Over Voltage Protection	Protection	-	-	600Vrms	Hiccup mode. The output voltage shall not exceed 600Vrms under no load, open load or other over voltage conditions.
Constant Output Power Protection		-	610W	-	Output power limited. The driver shall come back to its original programmed current after the fault condition is cleared.
Output Short Circuit Protection		-	-	-	Hiccup mode
Internal Over Temperature Protection		85°C	-	95°C	Output power derating. Refer to Appendix 6 "Internal Over Temperature Protection" for more details.
Programmable External Over Temperature Protection		80°C	-	110°C	Output power derating. Refer to Appendix 7 "Programmable External Over Temperature Protection" for more details.

# LED Driver

## EUCO ARENA SPORT 600 W Series

### Electro-Magnetic Compatibility (EMC)






Specification	Standards
<b>EMC-Emission Characteristics</b>	
Radiated Emission	EN55015
Conducted Emission	EN55015
Harmonic Current Emission	EN61000-3-2
Voltage Fluctuation & Flicker	EN61000-3-3
<b>EMC-Immunity Characteristics</b>	
Electrostatic Discharge (ESD)	EN 61000-4-2
Radio Frequency Electro-magnetic Fields	EN 61000-4-3
Electrical Fast Transient (EFT)	EN 61000-4-4
Surge (AC Mains)	EN 61000-4-5 - Common Mode: 10kV <sup>3</sup> (Line to Earth, Neutral to Earth) - Differential Mode: 6kV (Line to Neutral)
Conducted Disturbance	EN61000-4-6
Voltage Dip & Interruptions	EN 61000-4-11

3. Level B, the peak of residual common mode voltage pulse from output +/- to Earth is typically around 2.5kV.

### Reliability Data

Specification	Test Conditions / Notes
Lifetime	50,000 hours applicable for 220Vac to 400Vac(50/60Hz) @100% of load, @ Ta 45°C Refer to "Lifetime versus Case Temperature Curve"
MTBF	475khrs at Ta=+45°C Telcordia SR-332

### Safety Agencies Approvals

Specification	Test Conditions / Notes
 <b>MARK</b>	EN 61347-2-13:2014, EN 61347-2-13/A1:2017 EN 61347-1:2015, EN 61347-1:2015/A1:2021 EN IEC 62384:2020
 <b>MARK</b>	BS EN 61347-2-13: 2014+A1:2017
 <b>MARK</b>	CE Declaration of Conformity.
 <b>MARK</b>	AS 61347-2-13: 2018 AS/NZS 61347-1: 2016+A1
 <b>REPORT</b>	CB report.
Isolation	Class I, input to output: non-isolation, DMX/RDM or DALI to input/output: reinforced isolation.

### Drivers for each circuit breaker


The maximum number of LED drivers connectable to a single MCB is recommended in the following table for maximum 600W and each nominal input voltage. Due to the different kinds of circuit breakers available on the market, this table is just for reference.

# LED Driver

## EUCO ARENA SPORT 600W Series


Input Voltage	MCB Type	10A	16A	20A	25A	32A	40A	63A
220Vac	B	2	4	5	6	8	10	15
	C							
400Vac	B	2	3	3	4	5	7	11
	C	3	5	6	7	9	11	18

### Physical Dimensions

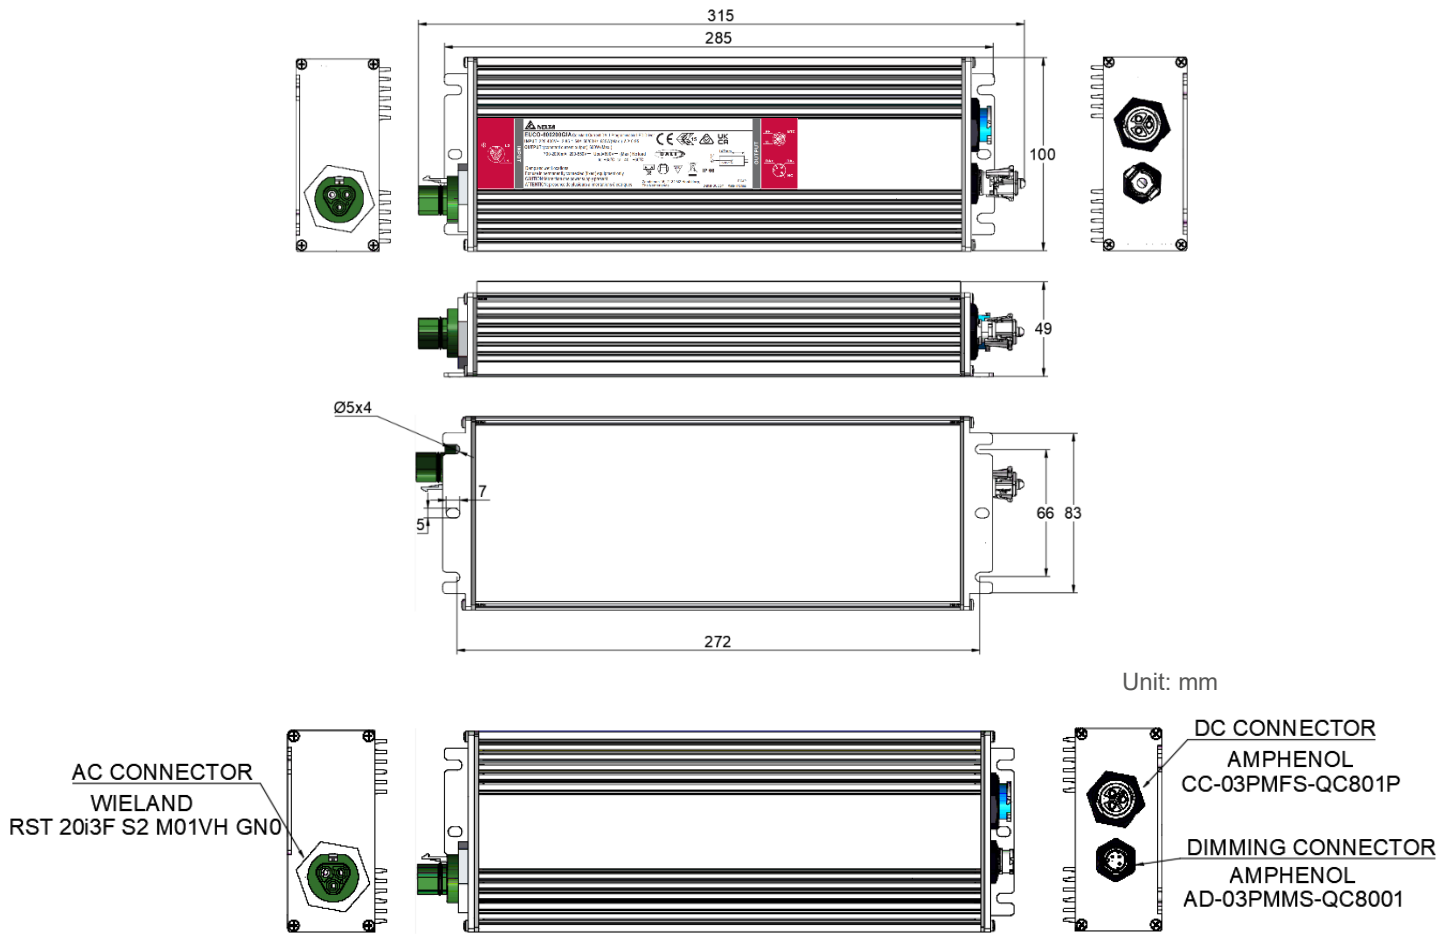


### Electrical Connection


a) Connect to the AC Input



Align key features of input connector on driver with connector on luminaire power cord.




Push connectors together until a click is heard.



To disassemble connectors, insert and twist a small blade screwdriver and then separate connectors.

# LED Driver

## EUCO ARENA SPORT 600W Series



custom AC input connection, use a Wieland RST20i3 green connector (96.031.4055.7 OR 96.031.0055.7)




Connector pin-out


Pin	AC Input Connector
1 <sup>o</sup>	L1 <sup>o</sup>
2 <sup>o</sup>	L2 <sup>o</sup>
3 <sup>o</sup>	PE <sup>o</sup>

Pin Arrangement


### b) Connect to the LED Output




Align key features of larger output connector on driver with connector on luminaire cable.




Push connectors together until the lock ring has snapped into place and a click is heard.



To disassemble connectors, twist the lock ring and then separate connectors.



Custom DC output connection, use a Amphenol X-lok C size connector (CC-03AFMM-QL8EXX(Overmolded with cable) OR CC-03BFMB-QL8APA(Field installable))




Connector pin-out


Pin	DC Input Connector
1 <sup>o</sup>	V+ <sup>o</sup>
2 <sup>o</sup>	NTC <sup>o</sup>
3 <sup>o</sup>	V- <sup>o</sup>

Pin Arrangement


### c) Connect to the Control/Dimming Output




Remove cap, align key features of Dimming connector on driver with connector on luminaire cable




Push connectors together until the lock ring has snapped into place and a click is heard.



To disassemble connectors, twist the lock ring and then separate connectors.



Custom Dimming connection, use a Amphenol X-lok A size connector (AD-03BFFM-QL8DXX(Overmolded with cable) OR AD-03BFFB-QL8AP0(Field installable))



Connector pin-out

Pin	Dimming Connector	
1 <sup>o</sup>	DA+ <sup>o</sup>	D1+ <sup>o</sup>
3 <sup>o</sup>	NC <sup>o</sup>	COM <sup>o</sup>
4 <sup>o</sup>	DA- <sup>o</sup>	D1- <sup>o</sup>


Pin Arrangement

# LED Driver


## EUCO ARENA SPORT 600W Series

Please note that Amphenol matching connector has two types as below. one is type A over molded with cable which is suitable for that the length of the cable is fixed, the part number is CC-03AFMM-QL8EXX and AD-03BFFM-QL8DXX ("XX" the length of cable). Another is type B connector and cable are separated, it will be best option for field installation, the part number is CC-03BFMB-QL8APA and AD-03BFFB-QL8AP0.



Receptacle to Overmolded with Cable

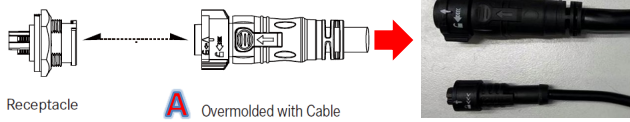

Receptacle to Field Installable

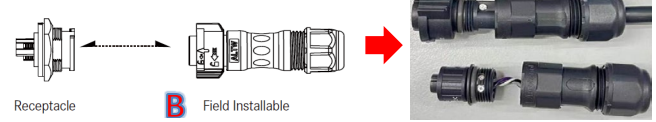

### Connection Schematic

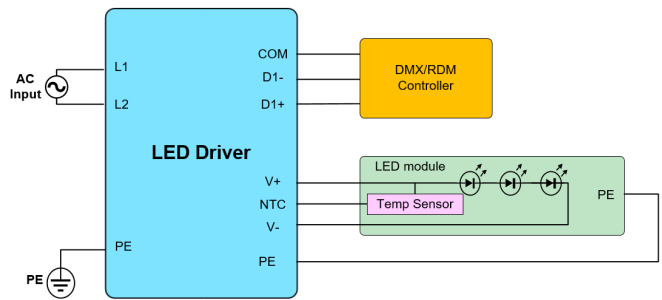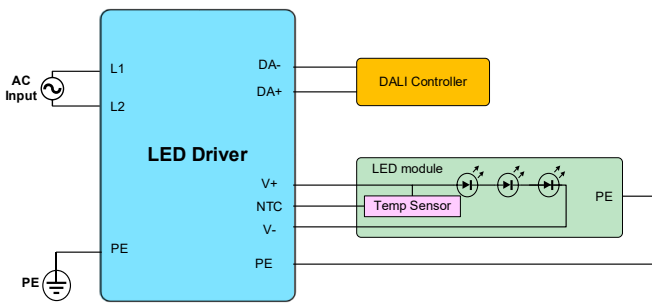

Note: There's no PE port in driver output for the luminaire connection, instead, the mounting hole of driver chassis could be connected for this function.




# LED Driver

## EUCO ARENA SPORT 600W Series


### Appendix

#### 1. Operating Range Curve


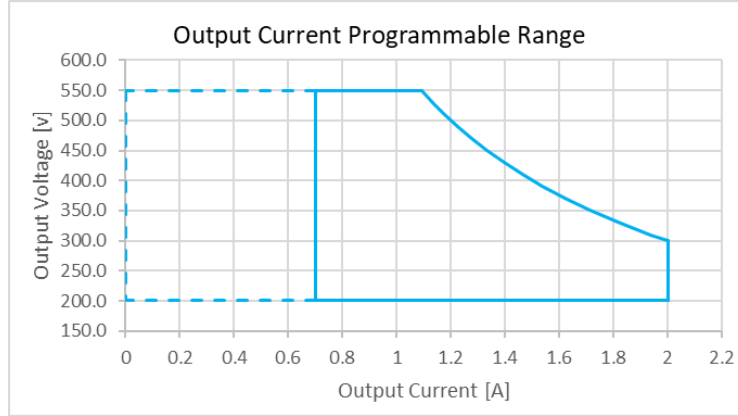


**Note:** EUCO ARENA SPORT 600W series can be programmed with wide output current through computer and programming tool. For more details, please refer to DALI programming User Manual or DMX/RDM programming User Manual.

#### 2. Life Time versus Case Temperature Curve

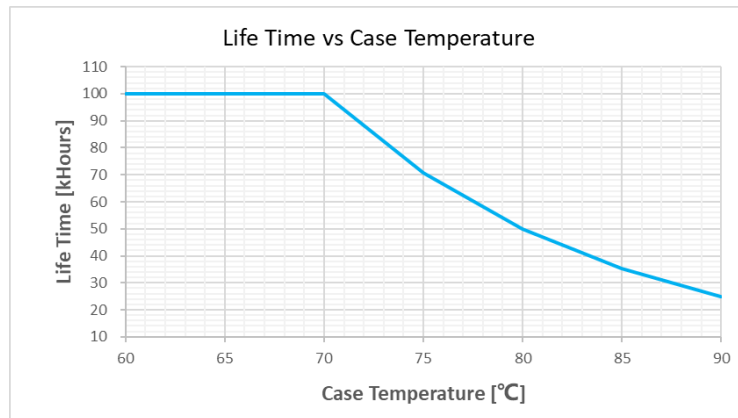


#### 3. Efficiency versus Load

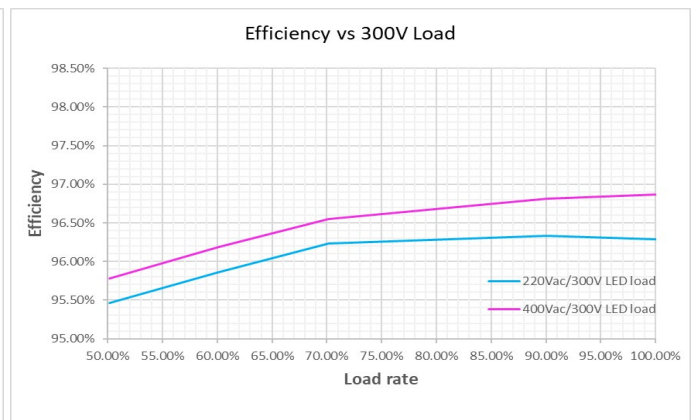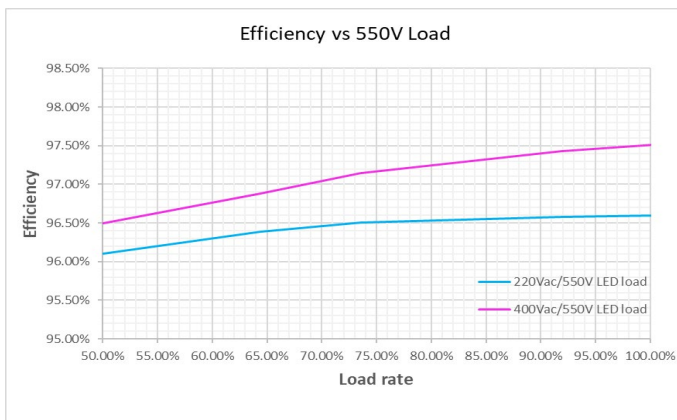


# LED Driver

## EUCO ARENA SPORT 600W Series

### 4. Power Factor versus Load

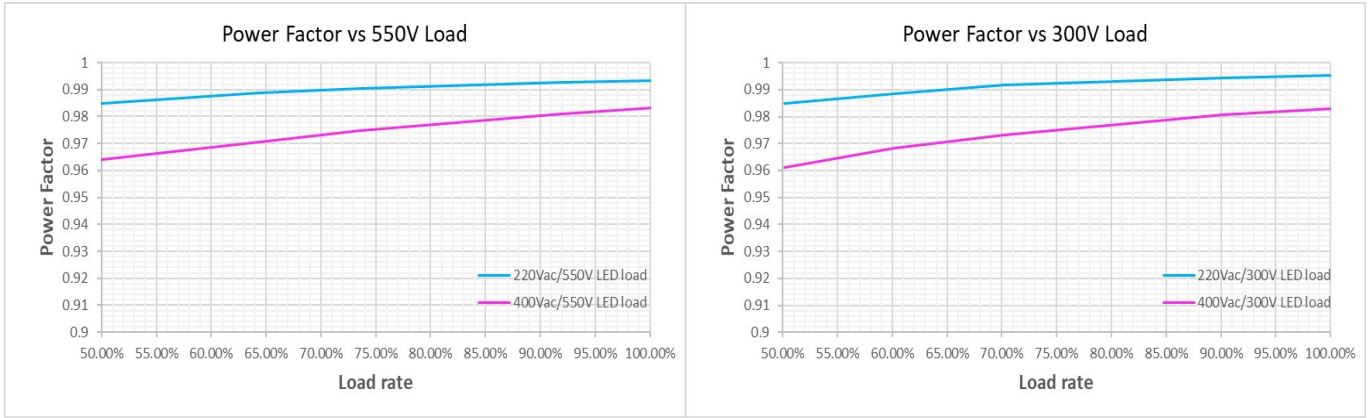


### 5. THD versus Load

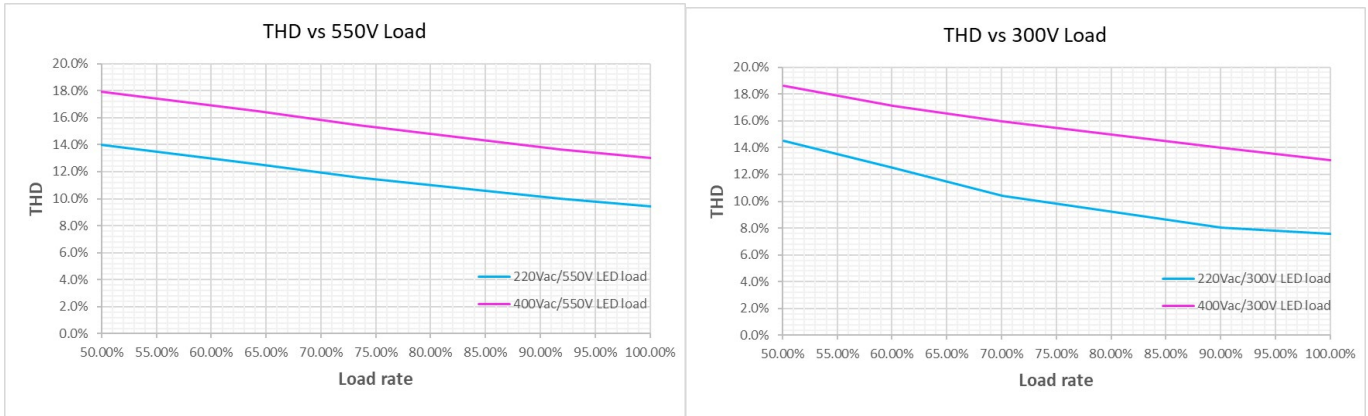

### 6. Internal Over Temperature Protection

This function ensures that the driver works under safe operating temperature condition. When the ambient temperature exceeds a fixed threshold ( $T_{c1} = 90^{\circ}\text{C}$  typical), the output current will decrease to 20% automatically to reduce the internal temperature of the driver. The minimum output current ratio is 20% of the value before the internal OTP enabled. The output current will recover to 100% when the internal temperature is below recovery threshold ( $T_{c2} = 80^{\circ}\text{C}$  typical).

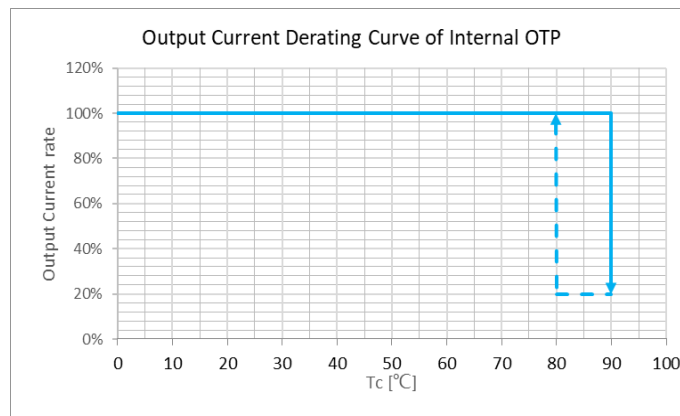


# LED Driver

## EUCO ARENA SPORT 600W Series

### 7. Programmable External Over Temperature Protection


This protection is an optional feature and user can ignore it without connecting to NTC connector in the junction box. The driver monitors the temperature of the LED module through NTC terminal. The output current will be reduced smoothly and linearly at OTP status and return to normal when the fault condition is removed.

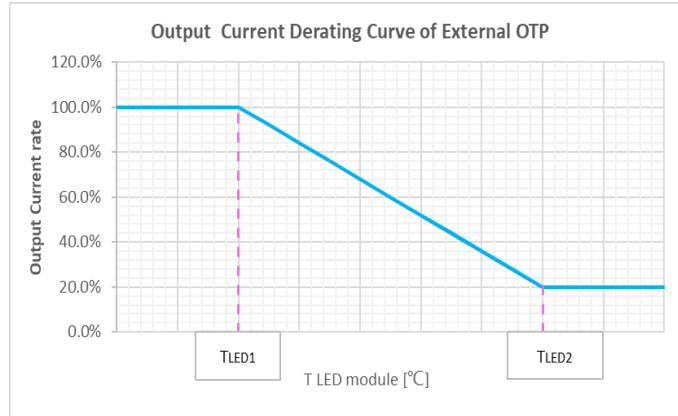

The trigger point of this protection can be set easily according to the actual conditions of the LED fixtures, the user can set the trigger point between 80°C and 110°C by the Delta programming tool, and the default value is 100°C. When the temperature exceeds the triggering point, the output current will decrease automatically to bring the temperature of the LED module back to safe value. More details about parameter setting please refer to DALI programming User Manual or RDM/DMX programming User Manual.

An external temperature sensing circuit is required to achieve the NTC terminal function to prevent the LED fixture from overheating.

The default setting is for a 33Kohm NTC, the circuits shown as both (a) and (b) below are acceptable.

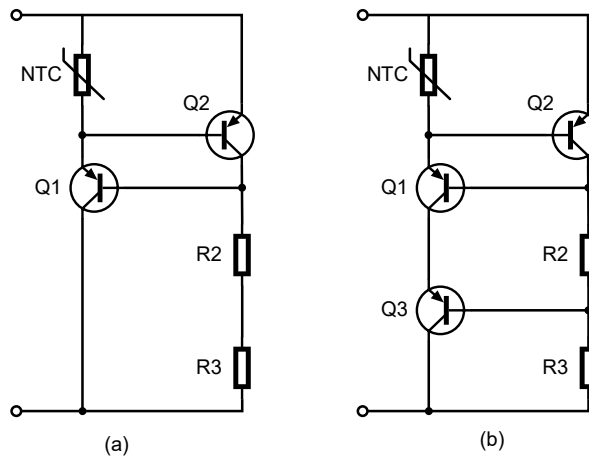


Parameter	Part	Manufacturer	Description
NTC	TSM1A333F3952RZA	THINKING	RES NTC 33Kohm F 3950K +/-1% SMD 0603 TP
R2 / R3	RC1206FR-07 5M1L	YAGEO	RES SMD 1/4W 5.1Mohm F 1206
Q1 / Q2 / Q3	PBHV9050T	NEXPERIA	-500V -250 mA PNP high-voltage low VCEsat transistor

**Note:** The circuits of above (a) and (b) have same OTP performance by using the same parts listed in the table, and to achieve good accuracy of OTP, Q2 should be placed close to NTC to make them have same temperature.

# LED Driver

## EUCO ARENA SPORT 600W Series

This product is also compatible with the circuitry for a 10Kohm NTC, this version could be selected and activated by “OTP on Fixture” section of GUI(Select “10K” in this section). The circuit and BOM table are shown as below.

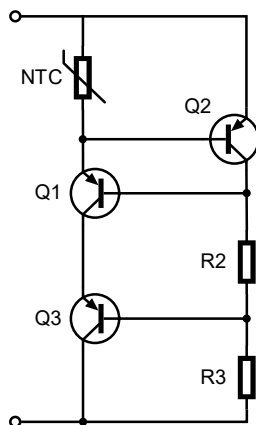

Parameter	Part	Manufacturer	Description
NTC	B57371V2103H060	TDK	RES NTC 10Kohm F 4480K +/-3% SMD 0603 TP
R2/R3	RC1206FR-07 1ML	YAGEO	RES SMD 1/4W 1Mohm F 1206
Q1/Q2	PBHV9050T	NEXPERIA	500V 150 mA PNP high-voltage low VCEsat transistor

**Note:** The output voltage need to be over 300V to be effective by using this 10Kohm NTC version. And to achieve good accuracy of OTP, Q2 should be placed close to NTC to make them have same temperature.